


Shock absorber flanged

PN10
PN16

WATER



Shock absorber flanged




DN		32	40	50	65	80	100	125	150	200	250	300	350	400	450	500	600
L +/- 5	[mm]	95	95	105	115	130	135	170	180	205	240	260	265	265	265	265	265
H	[mm]	69	69	85	106	116,0	150	180	209	260	320	367	408	472	522	570	690
P	[mm]	40	40	52	68	76,0	103	128	152	194	250	300	320	372	415	454	580
Squeeze	[mm]	9	10	10	13	15,0	19	19	20	25	25	25	25	25	25	25	25
Extension	[mm]	6	6	7	7	8	10	12	12	16	16	16	16	16	16	16	16
Shift bias [S]	[mm]	9	9	10	11	12	13	13	14	22	22	22	22	22	22	22	22
Displacement angle [Q]	[°]	15	15	15	15	15	15	15	15	15	15	15	15	15	15	15	15
Weight	[kg]	3,0	3,57	4,11	5,13	6,23	6,98	9,64	12,4	17,3	22,7	29,15	38,9	48,0	55,4	66,0	73,0

Product description (standard execution):

- Flanges made of galvanized steel
- Gasket made of EPDM rubber EN ISO 1629

Application:

Water lines networks: potable water seawater pumping systems heating and air conditioning with max. working pressure PN10/PN16

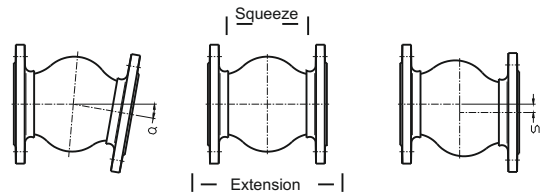


Shock absorber threaded ends

PN10
PN16

WATER



Shock absorber threaded ends

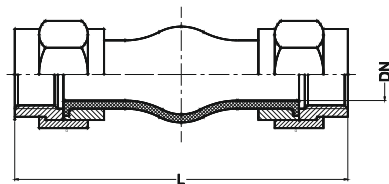

Product description (standard execution):

- Galvanized steel ends
- Gasket made of EPDM rubber EN-ISO 1629

Application:

Water lines networks: potable water seawater pumping systems heating and air conditioning with max. working pressure PN10/PN16

DN	G	L _{min-max}	K	Weight
[mm]	[cal]	[mm]	[°]	[kg]
20	3/4"	203 (+/- 22)	32	0,8
25	1"		25	1,1
32	1-1/4"		25	1,4
40	1-1/2"		20	1,7
50	2"		15	2,4
65	2-1/2"		12	4,3
80	3"		10	4,9

We reserve the rights to modify the production program and the given data without separate notices due to the permanent company development